
PR 6423/.. series **Eddy current displacement sensor**

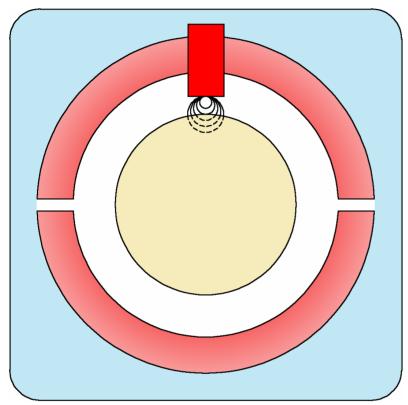

- Contactless measurement of static and dynamic shaft displacement e.g.
 - Axial and radial shaft displacement
 - Shaft eccentricity
 - **Shaft vibration**
 - Abrasion of thrust bearings
 - Measurement of the oil film - thickness
 - crack detection
- Meets all industrial requirements
- Developed as to the requirements of international standards, e.g. API 670, DIN 45670, ISO 10817-1
- Suitable for operating in explosive areas, Eex ib IIC T6/T4
- Part of the MMS 3000 and MMS 6000 machine monitoring systems

Applications:

Measuring systems with eddy cur- Measuring quantities are e.g.: rent transducers serve the measurement of mechanical quantities, such as shaft vibration and shaft displacement. Applications such systems can be found in different industrial areas and laborato-

Due to the contactless measuring principle, small dimensions, a rugged construction and the endurance against aggressive media, this type of sensor is optimally suitable for the use at all kind of turbo ma-

epro offers a wide range of devices for measuring and monitoring.

- Air-gaps between rotating and stationary parts
- Vibrations of machine shafts and housing parts
- Shaft-dynamic and eccentricity
- Deformation and deflection of machine-parts
- Axial and radial shaft displacement
- Abrasion and position measurements at thrust bearings
- Thickness of oil film in the bearing
- Differential expansion
- Housing expansion
- Valve position

Construction and dimensions of measuring amplifier and relevant sensors apply to international standards, e.g. API 670, DIN 45670 and ISO 10817-1.

At connection via safety barriers, sensors and signal converters may also be operated in hazardous areas. The certificate of conformity according to the European standard EN 50014/50020 has been submit-



Function principle and design:

Together with the signal converter CON 0.. the eddy current sensor forms an electric oscillator whose proach of metallic targets in front of the sensor head.

The damping coefficient is propor-

tional to the distance hetween transducer and measuring target. Upon delivery, the sensor could be amplitude is damped by the ap- adjusted to the converter and to the measuring material, thus there is no additional adjustment work necessary for the installation.

Only the initial air-gap between transducer and measuring target must be adjusted to get the correct signal at the output of the converter.

Transducer versions:

To meet all requirements of meas- The following standard versions uring tasks and environmental con- are available ex stock: ditions, epro offers eddy current sensors in several different versions and constructions.

The available sensor versions can be found in the order matrix.

PR 6423/000-000 PR 6423/010-000 PR 6423/100-000




All other versions have longer delivery times!

Depending on the chosen version. the sensors have the following characteristics:

- Housing with thread and axial cable outlet
- Connections with self locking, waterproof plugs or open cable
- Flexible cable protection
- Adaptor plug at 1 m

Dimensions:

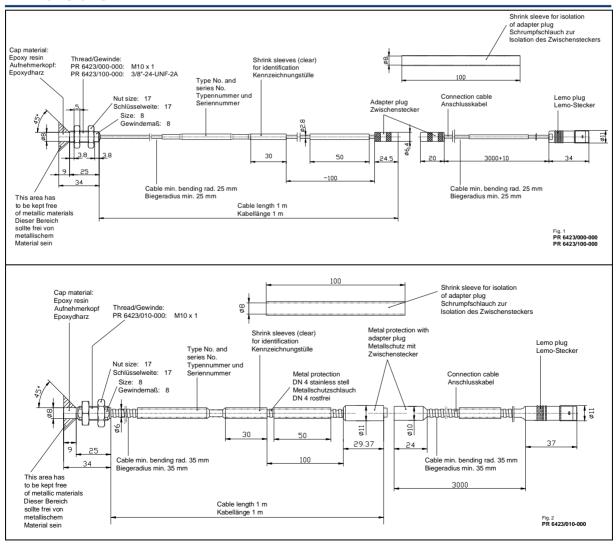

Technical data:

If not stated otherwise, the technical data apply to all versions of the PR 6423.

Measuring range:

static: ±1,0 mm dynamic: 0...50...500 µm

Sensitivity:

8 V/mm

Measuring target:

Material:

Electrically conducting steel
Form of the measuring target:
Cylindrical shafts, plain
surfaces, measuring collars at
machine shafts
Height of the measuring collar
on the shaft surface with 1%
additional error:
≥25 mm
Peripheral speed of the shaft:

0...2500 m/s Shaft diameter: ≥25 mm

Nominal gap (centre of measuring range): 1,5 mm

Measuring error:

After calibration and in connection with a CON 0..., the specification are related to the f.s.d.

Linearity error:

≤ ±1 %

Temperature error:

Zero point: 200 mV / 100 K Sensitivity: < 2%/100 K Long-term drift: 0,3 % max.

Influence of supply voltage: <20 mV / V

Operating temperature range:

-35...+180°C short-term: up to +200°C

Temperature range for storage and transport:

-40...+70°C

Thread of sensor housing:

M10 x 1 or

3/8"-24-UNF-2A

Housing material:

stainless steel

Endurance to pressure (uniform influence on transducer and cable):

2 bar

Vibration and shock (nominal values at max. 25 C):

5 g at 60 Hz

Cable length:

PR 6423/000-000; PR 6423/100-000; PR 6423/010-000: 1 m at the transducer + 3 m extension cable

Other cable lengths possible according to order matrix.

Max. cable temperature:

+200°C

Connection of transducers to converters CON 011/CON 021:

Lemo plug

Connection of transducers to converters CON 031 /CON 041:

open cable ends for screw terminal

Direct connection of PR 6423 with Lemo - plug to the following MMS 3000 transmitters:

MMS 3110 MMS 3210 MMS 3311

Cable protection:

PTFE


Weight:

net weight without / with metal protection tube: 0,1 / 0,3 kg gross weight without/with metal protection tube: 0,2 / 0,5 kg

Dimensions:

The dimensions for the standard versions can be found in the drawings fig. 1 and fig. 2.

Static output characteristic:

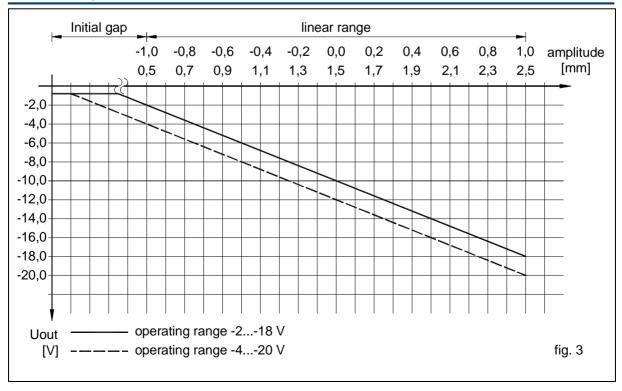

Order matrix PR 6423:

PR 6423/	X	Х	X	-	Χ	Х	X
Sleeve thread:				-			
M10 x 1	0						
3/8"-24-UNF-2A	1						
Metal protection tube:				-			
without		0					
with		1					
Sleeve length (+9,0 mm = total length):				-			T
25 mm	١	۱	0				
35 mm			1				
45 mm	١	۱	2				
55 mm	١	١	3				
65 mm	l	l	4				
75 mm	١	۱	5				
85 mm			6				
95 mm			7				
105 mm			8				
115 mm (max. length)			9				
Adaptor plug at 1 m:				-			H
with			١		0		
without					1		
Total cable length:				-			
4 m			١		١	0	
5 m		١			١	1	
6 m	١	١			١	2	
8 m	١	١			١	3	
10 m						4	
Cable end:				-			
Lemo CON plug	l						0
open cable end							1
PR 6423/							
The following standard versions	<u></u>	1	1	l	1	l	1

The following standard versions are available ex stock:

> PR 6423/000-000 PR 6423/010-000 PR 6423/100-000

All other versions have longer delivery times!

To order the desired transducer at **epro**, please define the relevant order code from the order matrix above.

Further information:

Additional information on current signal converters".

the The sensors may be operated with function of transducer and converter converters of type CON 0x1/91 also are shown in data sheet "Eddy with extended measuring ranges. Further information on this can be found in data sheet "Eddy current signal converter for measuring ranges".

